G-lambda

GNS-WSI version 3

(Grid Network Service – Web Services Interface, version 3) DRAFT

PRELIMINARY INFORMATION

The G-lambda project http://www.g-lambda.net/

Dec. 25 2008

Table of Contents

1.	Ir	ntrodu	ction	. 6
	1.1	. G-	lambda project	. 7
	1.2	. Re	ferences	. 7
2.	Ν	lotatio	n Conventions	. 8
3.	С	efiniti	ons	. 8
4.	G	SNS-V	/SI Services	. 9
5.	S	State N	1odel	. 9
	5.1	. Re	servationStatus	. 9
	5.2	. Co	ommandStatus	10
6.	Ρ	rotoc	ol Sequence of Advance Reservation Process	11
	6.1	. Sta	ate Transitions in the two-phase commit operation	11
	6.2	. Re	eservation Diagrams	13
	6.3	. Mo	odification Diagrams	14
	6.4	. Re	elease Diagrams	15
7.	P	ort-ty	oes	16
8.	F	Reserv	ationFactory Port-Type	17
	8.1	. cre	eate	17
	8	3.1.1.	Input(s)	17
	8	3.1.2.	Output(s)	17
	8	3.1.3.	Fault	17
	8.2	. ge	tAvailableResources	17
	8	3.2.1.	Input	18
	8	3.2.2.	Output	18
	8	3.2.3.	Fault	18
	8.3	. ch	eckResourceAvailability	18
	8	3.3.1.	Input	18
	8	3.3.2.	Output	19
	8	3.3.3.	Fault	19
9.	F	Reserv	ation Port-Type	19
	9.1	. res	serve	19
	9	.1.1.	Input(s)	
	9	.1.2.	Output(s)	20
	9	.1.3.	Fault	20
	9 2	m	odify	20

9.2.1.	Input(s)	20
9.2.2.	Output(s)	21
9.2.3.	Fault	21
9.3. mod	difyAll	21
9.3.1.	Input(s)	21
9.3.2.	Output(s)	21
9.3.3.	Fault	21
9.4. rele	ase	22
9.4.1.	Input(s)	22
9.4.2.	Output(s)	22
9.4.3.	Fault	22
9.5. rele	aseAll	22
9.5.1.	Input(s)	23
9.5.2.	Output(s)	23
9.5.3.	Fault	23
9.6. getl	ReservationStatus	23
9.6.1.	Input(s)	23
9.6.2.	Output(s)	24
9.6.3.	Fault	24
9.7. getl	ResourceProperty	24
9.7.1.	Input(s)	24
9.7.2.	Output(s)	24
10. Reser	vationCommand Port-Type	25
10.1. c	ommit	25
10.1.1.	Input(s)	25
10.1.2.	Output(s)	25
10.1.3.	Fault	25
10.2. a	bort	26
10.2.1.	Input(s)	26
10.2.2.	Output(s)	26
10.2.3.	Fault	26
10.3. g	etCommandStatus	26
10.3.1.	Input(s)	26
10.3.2.	Output(s)	27
10.3.3.	Fault	27
10.4. g	etResourceProperty	27

10.4	l.1. Input(s)	. 27
10.4	I.2. Output(s)	. 27
11. D	ata types	. 28
11.1.	Reservation related data types	. 28
11.1	.1. ResourceStatus_Type	. 28
11.1	.2. ReservationStatus_Type	. 28
11.1	.3. CommandStatus_Type	. 28
11.1	.4. TimeUnit_Type	. 29
11.1	.5. ResourceInformation_Type	29
11.1	.6. ReservationResources_Type	. 30
11.1	.7. AvailableResourceQuery_Type	. 30
11.1	.8. AvailableResourceQueryResult_Type	. 30
11.1	.9. SLADocument_Type	. 31
11.1	.10. ResourceRequirements_Type	. 31
11.1	.11. CoallocationTimeframe_Type	. 31
11.1	.12. ReservationStatusHolder_Type	. 32
11.1	.13. ReservationCommandHistory_Type	. 32
11.1	.14. TimeSpecification_Type	. 32
11.1	.15. CoallocationTimeSpecification_Type	. 33
11.1	.16. Timeframe_Type	. 33
11.1	.17. ExactTimeframe_Type	. 33
11.1	.18. RangeTimeframe_Type	. 33
11.1	.19. Duration_Type	. 34
11.1	.20. ResouceAttribute_Type	. 34
11.1	.21. SLAAttribute_Type	. 34
11.2.	Network resources related data types	. 34
11.2	2.1. BWUnit_Type	. 34
11.2	2.2. SwitchingScheme_Type	. 35
11.2	2.3. NetworkResources_Type	. 35
11.2	2.4. Path_Type	. 36
11.2	2.5. Endpoint_Type	. 36
11.2	2.6. Termination_Point_Type	. 36
11.2	2.7. Route_Type	. 37
11.2	2.8. SubPath_Type	. 37
11.2	= 71	
11.2	2.10. Bandwidth_Type	. 38

11.2.11.	GeneralBW_Type	. 38
11.2.12.	PathProperties_Type	. 39
11.2.13.	MediaType_Type	. 39
11.2.14.	OtherMediaType_Type	. 40
11.2.15.	EthernetParameters_Type	. 40
11.2.16.	MPLSParameters_Type	. 40
11.2.17.	IPParameters_Type	. 40
11.2.18.	NetworkResourceSLADocument_Type	. 41
11.3. Co	mpute resources related data types	. 42
11.3.1. (ComputeResources_Type	. 42
11.3.2.	ComputeResourcesSLADocument_Type	. 42
11.4. IAN	NA Mau MIB types	. 42
11.4.1. I	ANAMauMIBTyepName_Type	. 43
11.4.2. I	ANAMauMIBType_Type	. 44
12. Error C	ases	. 45
13. Optiona	al Extensions	. 45
13.1. Life	etime	. 45
13.2. No	tification	. 45
13.3. SL	A	. 45
14 Security	v Consideration	45

1. Introduction

This document specifies GNS-WSI3 (Grid Network Services – Web Services Interface ver.3) protocol for dynamically reserving and allocating network resource. GNS-WSI3 has been discussed and defined in the G-lambda project (http://www.g-lambda.net). In the concept of G-lambda, network resources are basically bandwidths between end-points such as optical paths (lambda), but connectivity such as VLAN can be also supported. Network resources are requested by end-users or middleware such as ASP (Application Service Provider) by reservation requests, and if a request is granted, the resource is automatically provisioned and released at the beginning and end of the reserved period. The G-lambda architecture assumes use of not only network resources but also compute and other resources in a unified manner as shown in Figure 1.

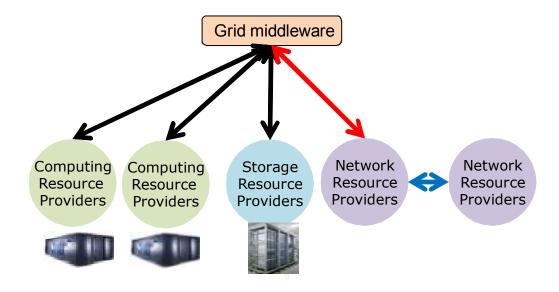


Figure 1. Unified interface for multiple types of resources.

Requests from end-users or upper layer middleware can be propagated in a tree structured request paths as shown in Figure 2.

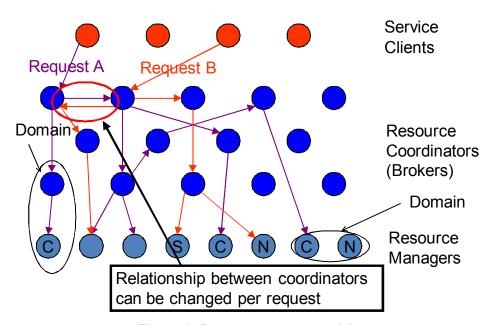


Figure 2. Per-request tree model.

GNS-WSI3 defines messages for checking availability of resources, reserving resources, gathering information about reserved and/or allocated resources, and modify/cancel existing reservations. GNS-WSI3 is defined using Web Services technology. The complete list of supported messages is defined by Web Services Description Language (WSDL). This document is based on the WSDL files shown in the appendices and provides additional details on the information elements in each message.

G-lambda project is currently working on defining both WSRF-based and non-WSRF-based GNS-WSI3. In this draft document, the WSRF-based version is explained. Additional information on non-WSRF-based interface will be provided in the future.

1.1. G-lambda project

G-lambda project is a joint research of National Institute of Advanced Industrial Science and Technology (AIST), KDDI R&D Laboratories, NTT, and the National Institute of Information and Communications Technology (NICT).

1.2. References

The following documents contain information that is relevant to this specification:

- [1] "Web Services Description Language (WSDL) 1.1", W3C Note. http://www.w3.org/TR/wsdl
- [2] OASIS Web Services Resource Framework (WSRF) 1.2 http://www.oasis-open.org/committees/tc_home.php?wg_abbrev=wsrf

- [3] IANA-MAU-MIB, Internet Assigned Numbers Authority (IANA), available at http://www.iana.org/assignments/ianamau-mib, April 2007.
- [4] Global Information Infrastructure and internet protocol aspects, ITU-T, Recommendation Y.1540, December 2002.

2. Notation Conventions

The key words "MUST," "MUST NOT," "REQUIRED," "SHALL," "SHALL NOT," "SHOULD," "SHOULD NOT," "RECOMMENDED," "MAY," and "OPTIONAL" are to be interpreted as described in RFC-2119 [RFC 2119]. This specification uses namespace prefixes throughout; they are listed in Table 1. Note that the choice of any namespace prefix is arbitrary and not semantically significant.

Table 1. Prefixes and namespaces used in this specification.

Prefix	Namespace
xsd	http://www.w3.org/2001/XMLSchema
rsv	http://schemas.glambda.net/gnswsi3/2008/10/reservation
rsvf	http://schemas.glambda.net/gnswsi3/2008/10/reservationfactory
rsvc	http://schemas.glambda.net/gnswsi3/2008/10/reservationcommand
rdl	http://schemas.glambda.net/gnswsi3/2008/10/rdl
cdl	http://schemas.glambda.net/gnswsi3/2008/10/cdl
ndl	http://schemas.glambda.net/gnswsi3/2008/10/ndl
jsdl	http://schemas.ggf.org/jsdl/2005/11/jsdl

3. Definitions

Client: An application, user, middleware or other NRM that requests resources.

ReservationCommandResource: A ReservationCommandResource is used to tread a operation for a reservation as a resource, and to manage a status of a operation. This is required to support the two phase commit protocol.

Domain: A network administrated by a telecommunication carrier, internet service provider, organization, group, or some other type of authority.

EndPoint Reference (EPR): A EndPoint Reference is used to address and access according to a resource, and represent a address of a resource at a given network endpoint.

Path: A pair of logical network endpoints. When a path allocates over different domains, a

path may contain sub-paths.

Port-Type: A port type is a named set of abstract operations and the abstract messages involved.

ReservationResource: A ReservationResource is used to tread a reservation as a resource, and to manage a state of a reservation.

Web Services Resource Framework (WSRF): The WSRF is a set of six Web services specifications that define what is termed the WS-Resource approach to modeling and managing state in a Web services context.

WS-Addressing: WS-Addressing provides transport-neutral mechanisms to address Web services and messages.

WS-BaseFault: WS-BaseFaults defines an XML Schema type for base faults, along with rules for how this base fault type is used and extended by Web services.

WS-ResourceProperties: WS-ResourceProperties is used to read and write properties for a stateful resource.

4. GNS-WSI Services

GNS-WSI provides the following services:

- ReservationFactoryService: Receives registration requests to book Grid resources. It also returns information on resources available on the Grid.
- ReservationService: Receives reservation, modification, and release requests. It also manages current status of reserved resources.
- ReservationCommandService: Supports two-phase commit. It manages the status of pre-reserve, -modify, and -release processes, and abort or commit for each process on order of users.

ReservationResource and ReservationCommandResource are service instances for ReservationService and ReservationCommandService for each user request, respectively.

5. State Model

5.1. ReservationStatus

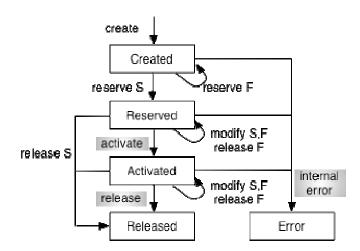


Figure 3. The ReservationStatus transition process.

ReservationStatus is an attribute of ReservationService and represents the current reservation status for each reservation request. The ReservationStatus transition process is shown in Figure 3. The ReservationStatus transition process consists of the following:

- Created: A registration request is accepted (ReservationResource is created).
- **Reserved**: Requested resources are booked.
- Activated: The resources are activated.
- **Released**: The resources are released.
- Error: Errors have occurred.

create, **reserve**, **modify**, and **release** in Figure 3 indicate operations of ReservationFactoryService and ReservationService invoked by a client. **S** and **F** represent success and failure or destruction by the client of each command. The gray squares represent status changes at the server side.

5.2. CommandStatus




Figure 4. The CommandStatus transition process.

CommandStatus is an attribute of ReservationCommandService and represents the current command status of each ReservationCommandResource created by a reservation-related operation such as reserve, modify, or release.

The CommandStatus transition process shown in Figure 4 consists of the following:

- *Initial*: reserve / modify / release command has been sent to an actual resource manager, but the request has not been completed yet.
- **Prepared**: The requested command has been prepared.
- **Committed**: The command has been completed.
- Aborted: The requested resources are not available or the pre-command has expired.
 commit and abort in Figure 4 are invoked by the client, and the gray squares also represent status changes at the server side. After CommandStatus has changed to Prepared, the client invokes commit or abort.

We use a modified two-phase commit protocol. Fundamentally, a two-phase commit is a blocking protocol. If a coordinator fails after a reserve request, CommandStatus may be left in the *Prepared* state until the coordinator is repaired and the requested resources are blocked for that duration. Moreover, a coordinator and its cohorts are loosely coupled on the Grid, and the coordinator may not issue a commit or abort request. We applied an automatic "time out" to the transit from *Prepared* to *Aborted*.

In our system, *Prepared* waiting for a commit or abort request times out at T_{timeout} as follows:

$$T_{timeout} = T_{transit} + \epsilon$$

T_{transit} indicates the state transit time from *Initial* to *Prepared*.

6. Protocol Sequence of Advance Reservation Process

6.1. State Transitions in the two-phase commit operation

Table 2 shows the state transition of command status corresponding to results of each phase.

From Initial, state transits to Prepared or Aborted according to the result of 1st phase

operation. From **Prepared**, state transits to **Committed** or **Aborted** according to the result of 2^{nd} phase (reception of commit command).

From **Aborted** and **Committed**, no state transition will happen since those are finalized state.

Table 2. State transition of command status.

Origin state Condition	Initial	Prepared	Aborted	Committed
1 st phase success	Prepared	-	-	-
1 st phase fail	Aborted	-	-	-
Reception of abort -		Aborted	-	-
command				
Reception of commit	-	Committed	-	-
command				
Timeout	-	Aborted	-	-

Table 3 shows the state transition of reservation status corresponding to results of each phase.

Initial state of reservation status is **Created**. 1st phase triggers no state transition, therefore the status is kept unchanged. In the success of 2nd phase, state transition occurs when operation is **Reserve** or **Release**. 2nd phase success of **Modify** just overwrite parameters of ReservationResource. When StartTime of a request comes (Activation phase), **Reserved** state transits to **Activated** or **Error** according to the result of activation operation. When EndTime of a request comes (Reservation expiration phase), **Activated** state transits to **Released** or **Error** according to the result of release operation.

Table 3. State transition of reservation status

Origin state Condition	Created	Reserved	Activated	Released	Error
1 st phase success (for	-	Reserved	Activated	-	-
Modify and Release)					
1 st phase fail (for	-	Reserved	Activated	-	-
Modify and Release)					
2 nd phase success (for	Reserved	-	-	-	-
Reserve)					
2 nd phase success (for	-	Reserved	Activated	-	-

Modify)					
2 nd phase success (for	-	Released	Released	-	-
Release)					
2 nd phase fail	Error	Error	Error	-	-
Activation success	-	Activated	-	-	-
Activation fail	-	Error	-	-	-
Reservation expiration	-	-	Released	-	-
(Release successful)					
Reservation expiration	-	-	Error	-	-
(Release fail)					

6.2. Reservation Diagrams

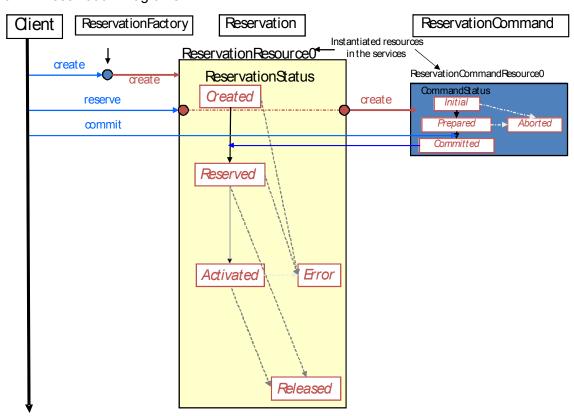


Figure 5. Protocol sequence of reservation process.

Figure 5 shows protocol sequence of reservation process.

- 1. ReservationResource is created by operation "create" of ReservationFactory service.
- 2. ReservationCommandResource is created by executing operation "reserve" of Reservation service on ReservationResource of state "Created".
- 3. ReservationCommandResource status transits from "Initial" to "Prepared" if the requested resource is available.

- 4. ReservationCommandResource status transits to "Committed" if operation "commit" of ReservationCommand service is conducted when the status is "Prepared".
- ReservationResource status becomes "Reserved" if the transition of ReservationCommandResource status to "Committed" is detected.

ReservationResouce status transits to "Activated" at StartTime of the request.

In process 3, if there is no resource available for a request, ReservationCommandResource status transits from "Initial" to "Aborted" and ReservationResource status is kept unchanged ("Created"). In the case that "commit" is not correctly conducted or is not conducted before timeout in process 4, ReservationCommandResource status also transits to "Aborted" and ReservationResource status is kept unchanged ("Created").

ReservationResource status transits to "Error" if release process becomes not able to be proceeded by any exception (ex. internal error).

Reservation **ReservationCommand Gient** ReservationResource0 Reservation Status **Created** Reserved ReservationCommandResource1 modify create CommandStatus Aborted <u>commit</u> Committed Activated **Error** ReservationCommandResource2 modify create Aborted **commit** Released

6.3. Modification Diagrams

Figure 6. Protocol sequence of modify process.

Figure 6 shows protocol sequence of modify process.

- 1. ReservationCommandResource is created by executing operation "modify" of Reservation service on ReservationResource of state "Reserved" or "Activated".
- 2. ReservationCommandResource status transits from "Initial" to "Prepared" if the

- requested resource is available.
- ReservaionCommandResource status transits to "Committed" if operation "commit" of ReservationCommand service is conducted when ReservationCommandResource status is "Prepared".
- 4. Parameters of ReservationResource are modified.

In process 2, if there is no resource available for a request, ReservationCommandResource status transits from "Initial" to "Aborted" and ReservationResource status is kept unchanged ("Reserved" or "Activated"). In the case that "commit" is not correctly conducted or is not conducted before timeout in process 3, ReservationCommandResource status also transits to "Aborted" and ReservationResource status is kept unchanged ("Reserved" or "Activated").

ReservationResource status transits to "Error" if release process becomes not able to be proceeded by any exception (ex. internal error).

6.4. Release Diagrams

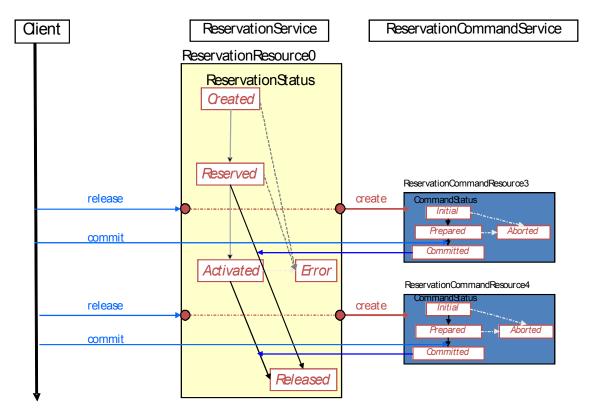


Figure 7. Protocol sequence of release process.

Figure 7 shows protocol sequence of release process.

1. ReservationCommandResource is created by executing operation "release" of Reservation service on ReservationResource of state "Reserved" or "Activated".

- 2. ReservationCommandResource status transits from "Initial" to "Prepared" if the resource is able to be released.
- ReservaionCommandResource status transits to "Committed" if operation "commit" of ReservationCommand service is conducted when ReservationCommandResource status is "Prepared".
- 4. ReservationResource status transits to "Released" if the transition of ReservationCommandResource status to "Committed" is detected.

In process 2, if there is no resource available for a request, ReservationCommandResource status transits from "Initial" to "Aborted" and ReservationResource status is kept unchanged ("Reserved" of "Activated"). If "commit" is not conducted until timeout in process 3, ReservationCommandResource status also transits to "Aborted" and ReservationResource status is kept unchanged ("Reserved" of "Activated").

ReservationResource status transits to "Error" if release process becomes not able to be proceeded by any exception (ex. internal error).

7. Port-types

Table 4 shows the summary of the GNS-WSI port-types and their operations. The details of each port-type are described in Section 8, 9, and 10.

Table 4. Summary of the GNS-WSI port-types and their operations.

ReservationFactory Port-Type							
create	Creates reservation resource						
getAvailableResources	Discovery of available resources						
checkResourceAvailability	Checks availability of specified resources						
Reservation Port-Type							
reserve	Makes advance reservation						
modify	Modifies specified reservation resources						
modifyAll	Modifies reservation time of all the reserved resources						
release	Releases specified reservation resources						
releaseAll	Releases all the reserved resources						
getReservationStatus	Returns the reservation status						
getResourceProperty	Returns specified ReservationResource property						
ReservationCommand Port-Type							
commit	Commits the request						
abort	Aborts the request						
getCommandStatus	Returns the command status						
getResourceProperty	Returns specified ReservationResource property						

8. ReservationFactory Port-Type

The ReservationFactory service creates a ReservationResource instance in the Reservation service.

Elements defined in this section have a namespace prefix rsvf.

8.1. create

The operation is used to create ReservationResource.

8.1.1. Input(s)

Entity Inherits from I		Description					
createRequest			Re	quest f	or creating a resource		
Property	Type Mul		ti.	Unit	Description		
DistinguishedName	string 0		1		A character string containing a user name who		
					reserved this resource. When the		
					DistinguishedName is null, the operation is		
					processed as an anonymous user		

8.1.2. Output(s)

Entity	Inherits from		Description							
createResponse		Response against a createRequest								
Property	Туре	Multi		Unit	Description					
ReservationEPR	EndpointReferen	1			An	end	point	reference	for	the
	сеТуре				Rese	rvationF	Resource			

8.1.3. Fault

Entity	Inherits from	Description
reservationFactoryFa	BaseFaultType	Fault type of ReservationFactory service
ult		

8.2. getAvailableResources

The operation is used to discover available resources.

8.2.1. Input

Entity	Inherits from		Description						
getAvailableResource			Request for discovering available resources						
sRequest									
Property	Туре	Mult	i. Unit	Description					
DistinguishedName	string	01		A character string containing a user name who					
				reserved this resource. When the					
				DistinguishedName is null, the operation is					
				processed as an anonymous user					
AvailableResourceQu	AvailableResour	1*		Query to discover available resources					
ery	ceQuery_Type								

8.2.2. Output

Entity	Inherits from		Description					
getAvailableResource			Response against a getAvailableRequest					
sResponse								
Property	Туре	Multi	. Unit	Description				
AvailableResourceQu	AvailableResour	0*		Result of getAvailableResourceQuery, which				
eryResult	ceQueryResult_			includes available reservation resources				
	Туре							

8.2.3. Fault

Entity	Inherits from	Description
reservationFactoryFa	BaseFaultType	Fault type of ReservationFactory service
ult		

8.3. checkResourceAvailability

The operation is used to check availability of specified resources.

8.3.1. Input

		Description	Inherits from	Entity
--	--	-------------	---------------	--------

checkResourceAvaila			Request f	for checking resource availability				
bilityRequest								
Property	Туре	Mult	i. Unit	Description				
DistinguishedName	string	01		A character string containing a user name who reserved this resource. When the DistinguishedName is null, the operation is				
ReservationResource	ReservationReso	1*		Reservation resources, each of which includes				
s	urces_Type			the reservation ID and the time specification				

8.3.2. Output

Entity	Inherits from			Description					
checkResourceAvaila			Response against a checkResourceAvailabilityRequest						
bilityResponse									
Property	Туре	Multi.		Unit	Description				
ResourceStatus	ResourceStatus_	1'	*		Status of a specified resource. The order				
	Туре				should be the same of ReservationResources				

8.3.3. Fault

Entity	Inherits from	Description
reservationFactoryFa	BaseFaultType	Fault type of ReservationFactory service
ult		

9. Reservation Port-Type

The Reservation service provides general reservation operations (e.g., reservation, modification, release). The Reservation service creates ReservationCommandResource instance in ReservationCommandService.

Elements defined in this section have a namespace prefix rsv.

9.1. reserve

The operation is used to create a reservation of some resources.

9.1.1. Input(s)

Entity	Inherits from			Description				
reserveRequest			Re	equest f	for reserving a resource			
Property	Туре	Multi.		Unit	Description			
ResourceRequiremen	ResourceRequir	1	ı		Information including resource requirements,			
ts	ements_Type				time resources, and DistinguishedName			

9.1.2. Output(s)

Entity	Inherits from		Description									
reserveResponse				Response against a reserveRequest								
Property	Туре	Mul	ti.	Unit	Description							
ReservationComman	EndpointReferen	1			An	end	point	reference	for	the		
dEPR	сеТуре				ReservationCommandResource							

9.1.3. Fault

Entity	Inherits from	Description
reservationFault	BaseFaultType	Fault type of Reservation service

9.2. modify

The operation is used to modify an existing reservation.

9.2.1. Input(s)

Entity	Inherits from C			Description				
modifyRequest			Red	quest f	for modifying specified reservation resources			
Property	Туре	Multi.		Unit	Description			
ResourceRequiremen	ResourceRequir	1			Information including resource requirements,			
ts	ements_Type				time resources, and DistinguishedName			

9.2.2. Output(s)

Entity	Inherits from		Description							
modifyResponse		Re	Response against a modifyRequest							
Property	Туре	Mul	ti.	Unit	Description					
ReservationComman	EndpointReferen	1			An	end	point	reference	for	the
dEPR	сеТуре				ReservationCommandResource					

9.2.3. Fault

Entity	Inherits from	Description
reservationFault	BaseFaultType	Fault type of Reservation service

9.3. modifyAll

The operation is used to modify all existing reservations.

9.3.1. Input(s)

Entity	Inherits from			Description					
modifyAllRequest			Re	quest f	or modifying all reservation resources				
Property	Туре	Mult	Multi.		ti. Unit Description				
Timeframe	Timeframe_Type	1			Time frame of a reservation				

9.3.2. Output(s)

Entity	Inherits from		De	Description							
modifyAllResponse				Response against a modifyAllRequest							
Property	Туре	Mult	ti.	Unit	Description						
ReservationComman	EndpointReferen	1			An	end	point	reference	for	the	
dEPR	сеТуре				Rese	rvation(Command	dResource			

9.3.3. Fault

Description	Inherits from
-------------	---------------

reservationFault	BaseFaultType	Fault type of Reservation service
------------------	---------------	-----------------------------------

9.4. release

The operation is used to release an active resource.

9.4.1. Input(s)

Entity	Inherits from	Inherits from Descrip			tion			
releaseRequest			Re	equest f	or releasing specified reservation resources			
Property	Туре	Mu	lti.	Unit	Description			
ReservationID	string	1	*		ReservationID is used to identify a set of			
					requested or reserved resources which is			
					requested by a reserve operation.			
					ReservationID is generated by the requestee of			
					the reserve operation.			

9.4.2. Output(s)

Entity	Inherits from		Description								
releaseResponse				Response against a releaseRequest							
Property	Туре	Multi.		Unit	Desc	ription					
ReservationComman	EndpointReferen	1			An	end	point	reference	for	the	
dEPR	сеТуре				Rese	rvation(Command	dResource			

9.4.3. Fault

Entity	Inherits from	Description
reservationFault	BaseFaultType	Fault type of Reservation service

9.5. releaseAll

The operation is used to release all active resources.

9.5.1. Input(s)

Entity	Inherits from		De	Description								
releaseAllRequest			Re	Request for releasing all reservation resources								
Property	Туре	Mul	lti.	Unit	Desc	ription						
	void				An	end	point	reference	for	the		
					Rese	rvation(Command	dResource				

9.5.2. Output(s)

Entity	Inherits from		De	Description							
releaseAllResponse			Re	Response against a releaseAllRequest							
Property	Туре	Mul	ti.	Unit	Description						
ReservationComman	EndpointReferen	1			An	end	point	reference	for	the	
dEPR	сеТуре				Rese	rvation(Command	dResource			

9.5.3. Fault

Entity	Inherits from	Description
reservationFault	BaseFaultType	Fault type of Reservation service

9.6. getReservationStatus

The operation is used to get the status of a reservation.

9.6.1. Input(s)

Entity	Inherits from		Description						
getReservationStatus			Re	quest	to check a specified ReservationResource				
Request			pro	operty					
Property	Туре	Mul	lti.	Unit	Description				
ReservationID	string	0	*		ReservationID is used to identify a set of				
					requested or reserved resources which is				
					requested by a reserve operation.				
					ReservationID is generated by the requestee of				
					the reserve operation.				

9.6.2. Output(s)

Entity	Inherits from			Description								
getReservationStatus			Re	Response against a getReservationStatusRequest								
Response												
Property	Туре	Multi.		Unit	Description							
ReservationStatusHol	ReservationStatu	1	.*		A holder of ReservationStatus and the							
der	sHolder_Type				ReservationID for the getReservationStatus							
					request							

9.6.3. Fault

Entity	Inherits from	Description
reservationFault	BaseFaultType	Fault type of Reservation service

9.7. getResourceProperty

The operation is used to get the ResourceProperty.

9.7.1. Input(s)

Reservation attribute name (javax.xml.namespace.QName).

9.7.2. Output(s)

Entity	Inherits from		De	scripti	cription				
ReservationResource			Properties of reserved resource						
Properties									
Property	Туре	Mult	ti.	Unit	Description				
DistinguishedName	string	01	1		A character string containing a user name who				
					reserved this resource. When the				
					DistinguishedName is null, the operation is				
					processed as an anonymous user				
ResourceInformation	ResourceInforma	0*	k		Category for resources, for example computing				

	tion_Type		or network resource
ReservationComman	ReservationCom	0*	History of user request information
dHistory	mandHistory_Ty		
	ре		
ErrorInfo	BaseFaultType	01	Reason when ResourceStatus /
			CommandStatus becomes an error

10. ReservationCommand Port-Type

The Reservation service realizes two-phase commit and non-blocking operation.

Elements defined in this section have a namespace prefix *rsvc*.

10.1. commit

The operation is used to commit a request.

10.1.1. Input(s)

Entity	Inherits from			Description								
commitRequest			Α	rec	quest	to	commit	the	operation			
			(res	serve/n	nodify/re	lease).						
Property	Туре	Mult	ti.	Unit	Description							
	void				Status	of a cor	mmand					

10.1.2. Output(s)

Entity	Inherits from			Description					
commitResponse				A response against a commitRequest.					
Property	Туре	Mult	Iti. Unit		Description				
	void				Status of a command				

10.1.3. Fault

Entity	Inherits from	Description
reservationCommand	BaseFaultType	Fault type of ReservationCommand service
Fault		

10.2. abort

The operation is used to abort a request.

10.2.1. Input(s)

Entity	Inherits from	Inherits from			Description							
abortRequest			Αr	equest	to abort the operation (reserve/modify/release).							
Property	Туре	Mu	lti.	Unit	Description							
	void				Status of a command							

10.2.2. Output(s)

Entity	Inherits from			Description					
abortResponse				A response against an abortRequest.					
Property	Туре	Mul	lti. Unit		Description				
	void				Status of a command				

10.2.3. Fault

Entity	Inherits from	Description
reservationCommand	BaseFaultType	Fault type of ReservationCommand service
Fault		

10.3. getCommandStatus

The operation is used to get CommandStatus.

10.3.1. Input(s)

Entity	Inherits from			Description								
getCommandStatusR			Α	requ	est	to	obtain	the	status	of	the	
equest			ReservationCommandResource.									
Property	Туре	Mult	ti.	Unit	Description							
	void				Stat	us of	a commar	nd				

10.3.2. Output(s)

Entity	Inherits from			Description					
getCommandStatusR				A response against a getCommandStatusRequest.					
esponse									
Property	Туре	Mul	ti.	Unit	Description				
CommandStatus	CommandStatus	1			Status of a command				
	_Type								

10.3.3. Fault

Entity	Inherits from	Description
reservationCommand	BaseFaultType	Fault type of ReservationCommand service
Fault		

10.4. getResourceProperty

The operation is used to get the ResourceProperty.

10.4.1. Input(s)

Reservation attribute name (javax.xml.namespace.QName).

10.4.2. Output(s)

Entity	Inherits from		Description						
ReservationComman			Α	set	of	properties	related	to	а
dResourceProperties				eservatio	onComm	andResource.			
Property	Туре	Mul	lti.	Unit	Descrip	otion			
CommandStatus	CommandStatus	1			Status of a command				
	_Туре								
ResourceInformation	ResourceInforma	0	1		Catego	ry for resources	s, for example	compu	ting
	tion_Type				or netwo	ork resource			
ErrorInfo	BaseFaultType	01			Reason	when	ResourceSt	atus	1
					Comma	ındStatus becoı	mes an error		

ReservationResource	string	1	Key of a ReservationResource
Key			

11. Data types

This section contains the definition of data types.

11.1. Reservation related data types

Elements defined in this section have a namespace prefix rdl.

11.1.1. ResourceStatus_Type

Closed enumeration

Entity	Inherits from	Description		
ResourceStatus_Type	string	Status of a specified resource. The order should be the		
		same of ReservationResources		
Value	Description			
Available	Resource is available			
NotAvailable	Resource is not available			

11.1.2. ReservationStatus_Type

Closed enumeration

Entity	Inherits from	Description					
ReservationStatus_Ty	string	Current reservation status for a reservation request					
ре							
Value	Description						
Created	A registration request is accepted (ReservationResource is create)						
Reserved	The requested resource is booked						
Activated	The resource is activate	The resource is activated					
Released	The resource is released						
Error	Errors have occurred						

11.1.3. CommandStatus_Type

Closed enumeration

Entity	Inherits from	Description				
CommandStatus_Typ	string	Status of a command				
е						
Value	Description					
Initial	A reserve / modify / release command has been sent to an actual resource manager					
Prepared	The requested comman	The requested command has been prepared				
Aborted	The requested resources are not available or the pre-command has expired					
Committed	The requested command has been completed					

11.1.4. TimeUnit_Type

Entity	Inherits from	Description
TimeUnit_Type	string	A unit of time
Value	Description	
MILLISECOND	Millisecond	
SECOND	Second	
MINUTE	Minute	
HOUR	Hour	
DAY	Day	
WEEK	Week	
MONTH	Month	
YEAR	Year	

11.1.5. ResourceInformation_Type

Entity	Inherits from		Description				
ResourceInformation_				Category for resources, for example computing or network			
Туре				resource			
Property	Туре	Mult	ti.	Unit	Description		
ReservationResource	ReservationReso	0*	*		Reservation resources, each of which includes		
s	urces_Type				the reservation ID and the time specification		

11.1.6. ReservationResources_Type

Entity	Inherits from		Description					
ReservationResource			Rese	ervatio	on resources, each of which includes the			
s_Type < <abstract>></abstract>			rese	ervatio	n ID and the time specification			
Property	Туре	Mult	ti. l	Unit	Description			
ReservationID	string	01	1		ReservationID is used to identify a set of			
					requested or reserved resources which is			
					requested by a reserve operation.			
					ReservationID is generated by the requestee of			
					the reserve operation.			
ReservationStatus	ReservationStatu	01	1		Current reservation status for a reservation			
	s_Type				request			
TimeSpecification	TimeSpecificatio	1			Time specification			
	n_Type							
ResourceAttribute	ResourceAttribut	0*	*		The resource is related to zero or more			
	e_Type				attributes			

11.1.7. AvailableResourceQuery_Type

Entity	Inherits from		Description				
AvailableResourceQu				Query to discover available resources			
ery_Type							
Property	Туре	Multi.		Unit	Description		
ReservationResource	ReservationReso	1			Reservation resources, each of which includes		
s	urces_Type				the reservation ID and the time specification		

11.1.8. AvailableResourceQueryResult_Type

Entity	Inherits from			Description			
AvailableResourceQu			Re	Result of getAvailableResourceQuery, which include			
eryResult_Type		av	available reservation resources				
Property	Туре	Mul	ti.	Unit	Description		
ReservationResource	ReservationReso	0	*		Reservation resources, each of which includes		
				1	the reservation ID and the time specification		

11.1.9. SLADocument_Type

Entity	Inherits from		De	Description			
SLADocument_Type			Se	Service Level Agreement (SLA) document			
< <abstract>></abstract>							
Property	Туре	Mu	lti. Unit		Description		
Timestamp	dateTime	1	.*		Time stamp		
SLAAttribute	SLAAttribute_Ty	0*			The SLADocument is related to zero or more		
	ре				attributes		

11.1.10. ResourceRequirements_Type

Entity	Inherits from			Description					
ResourceRequiremen			Inf	ormatio	n including	resource	requirements,	time	
ts_Type			re	sources	, and Distingui	shedName			
Property	Туре	Mul	ti.	Unit	Description				
CoallocationTimefram	CoallocationTime	0	*		Coallocation	time frame			
е	frame_Type								
ReservationResource	ReservationReso	1	*		Reservation i	resources, e	each of which inc	ludes	
s	urces_Type				the reservation	on ID and th	e time specification	on	

11.1.11. CoallocationTimeframe_Type

Entity	Inherits from		Description			
CoallocationTimefram			Coallocation time frame			
e_Type						
Property	Туре	Multi.		Unit	Description	
CoallocationTimefram	string	1			Coallocation time frame ID	
eID						
Timeframe	Timeframe_Type	1			Time frame of a reservation	

11.1.12. ReservationStatusHolder_Type

Entity	Inherits from		Description				
ReservationStatusHol			A holder of ReservationStatus and the ReservationID for				
der_Type			the ge	tRe	servationStatus request		
Property	Туре	Mult	i. Un	it	Description		
ReservationID	string	1			ReservationID is used to identify a set of		
					requested or reserved resources which is		
					requested by a reserve operation.		
					ReservationID is generated by the requestee of		
					the reserve operation.		
ReservationStatus	ReservationStatu	1			Current reservation status for a reservation		
	s_Type				request		

${\tt 11.1.13. \ Reservation Command History_Type}$

	7= 71							
Entity	Inherits from		Description					
ReservationComman			History of user request information					
dHistory_Type								
Property	Туре	Muli	ti.	Unit	Description			
Timestamp	dateTime	1			Time stamp			
ReservationComman	EndpointReferen	1			An end point reference for the			
dEPR	сеТуре				ReservationCommandResource			
OperationName	string	1			Name of an operation			
OperationArg	string	01			Argument of an operation			
FinalCommandStatus	CommandStatus	01	1		Final CommandStatus			
	_Type							

11.1.14. TimeSpecification_Type

Entity	Inherits from		Description				
TimeSpecification_Ty			Time specification				
pe < <abstract>></abstract>							
Property	Туре	Mult	ti. Unit	Description			
	void						

11.1.15. CoallocationTimeSpecification_Type

Entity	Inherits from		Description			
CoallocationTimeSpe	TimeSpecification_Ty		Time specification for co-allocation			
cification_Type	ре					
Property	Туре	Mul	ti.	Unit	Description	
CoallocationTimefram	string	0	1		Coallocation time frame ID	
eID						

11.1.16. Timeframe_Type

Entity	Inherits from		Description			
Timeframe_Type	TimeSpecification_	Ту	Time frame of a reservation			
< <abstract>></abstract>	ре					
Property	Туре	Mul	ti.	Unit	Description	
	void					

11.1.17. ExactTimeframe_Type

Entity	Inherits from		Description			
ExactTimeframe_Typ	Timeframe_Type		Exact time frame type			
е						
Property	Туре	Mul	ti.	Unit	Description	
StartTime	dateTime	1			Start time of a reservation	
EndTime	dateTime	1			End time of a reservation	

11.1.18. RangeTimeframe_Type

Entity	Inherits from	n		Description			
RangeTimeframe_Typ	Timeframe_Type	e_Type		Ranged time frame type			
е							
Property	Туре	Mul	ti.	Unit	Description		
Duration	Duration_Type	1			Duration		

EarliestStartTime	dateTime	01	Earliest start time of a reservation
LatestStartTime	dateTime	01	Latest start time of a reservation

11.1.19. Duration_Type

Entity	Inherits from		Description			
Duration_Type			Duration			
Property	Туре	Multi.	Unit	Description		
DurationValue	long	1		A value of duration		
TimeUnit	TimeUnit_Type	1		A unit of time		

11.1.20. ResouceAttribute_Type

Entity	Inherits from		Description			
ResourceAttribute_Ty			The resource is related to zero or more attributes			
ре						
Property	Туре	Mult	ti.	Unit	Description	
Key	string	1			An attribute name	
Value	string	1			A value for the attribute	

11.1.21. SLAAttribute_Type

Entity	Inherits from		Description		
SLAAttribute_Type			The SLADocument is related to zero or more attributes		
Property	Туре	Multi.		Unit	Description
Key	string	1	1		An attribute name
Value	string	1			A value for the attribute

11.2. Network resources related data types

Elements defined in this section have a namespace prefix *ndl*.

11.2.1. BWUnit_Type

Closed enumeration

Entity	Inherits from	Description					
BWUnit_Type	string	A unit of data transfer rate.					
Value	Description	escription					
Pbps	A unit of data transfer rate equal to 1,000 Tbps.						
Tbps	A unit of data transfer rate equal to 1,000 Gbps.						
Gbps	A unit of data transfer rate equal to 1,000 Mbps.						
Mbps	A unit of data transfer ra	A unit of data transfer rate equal to 1,000 kbps.					
kbps	A unit of data transfer rate equal to 1,000 bps.						
bps	Bit per second.						

11.2.2. SwitchingScheme_Type

Closed enumeration

Entity	Inherits from	Description			
SwitchingScheme_Ty	string	A switching/routing scheme in a path.			
ре					
Value	Description				
LAMBDA	Lambda service path.				
ETHERNET	L2 Ethernet service path.				
ATM	ATM service path.	ATM service path.			
MPLS	MPLS service path.				
IP	L3 IP service path.				

11.2.3. NetworkResources_Type

Entity	Inherits from		Description			
NetworkResources_T	ReservationResource		A set of network resource information.			
уре	s_Type					
Property	Туре	Mul	ti.	Unit	Description	
Path	Path_Type	01			A pair of logical network endpoints. When a	
					path allocates over different domains, a path	
					may contain sub-paths.	
NetworkResourceSLA	NetworkResourc	0	1		A set of information related to network service	
Document	eSLADocument_				level agreement (SLA).	

Туре			
------	--	--	--

11.2.4. Path_Type

Entity	Inherits from		Description			
Path_Type			A pair of logical network endpoints. When a path allocates			
			over different domains, a path may contain sub-paths.			
Property	Туре	Multi	. Unit	Description		
APoint	Endpoint_Type	1		An endpoint in a path. An APoint must be paired		
				with a ZPoint.		
ZPoint	Endpoint_Type	1		An endpoint in a path. A ZPoint must be paired		
				with an APoint.		
Route	Route_Type	01		A list of subsets of the path.		
Bandwidth	Bandwidth_Type	1		An abstracted element of a requesting and		
				assigned bandwidth.		
PathProperties	PathProperties_	01		A set of path information.		
	Туре					

11.2.5. Endpoint_Type

Entity	Inherits from		Description			
Endpoint_Type			A termination site of a path or sub-path. An endpoint may			
			contain termination points of connections.			
Property	Туре	Multi	. Unit	Description		
DomainName	string	01		A name of a domain, which is a network		
				administrated by a telecommunication carrier,		
				internet service provider, organization, group,		
				or some other type of authority.		
TerminationPoint	TerminationPoint	0*		A physical or logical termination point of a		
	_Type			connection.		

11.2.6. Termination_Point_Type

Entity	Inherits from	Description
--------	---------------	-------------

TerminationPoint_Typ		,	A physical or logical termination point of a connection.			
е						
Property	Туре	Multi	Unit	Description		
TerminationPointNam	string	01		A name of a termination point.		
е						
MediaType	MediaType_Type	01		A media type of a termination point.		

11.2.7. Route_Type

Entity	Inherits from		De	Description			
Route_Type			A list of subsets of the path.				
Property	Туре	Mul	ti.	Unit	Description		
SubPath	SubPath_Type	1	*		A pair of logical network endpoints. An NRM		
					handling a sub-path may be different domain		
					from the domain of the NRM handling a path.		

11.2.8. SubPath_Type

Entity	Inherits from		Description				
SubPath_Type			Α	A pair of logical network endpoints. An NRM handling a			
			sub-path may be different domain from the domain of the				
			NRM handling a path.				
Property	Туре	Mul	ti.	Unit	Description		
APoint	Endpoint_Type	1			An endpoint in a path. An APoint must be paired		
					with a ZPoint.		
ZPoint	Endpoint_Type	1			An endpoint in a path. A ZPoint must be paired		
					with an APoint.		
Nrm	Nrm_Type	1			An NRM information handling a sub-path.		

11.2.9. Nrm_Type

Entity	Inherits from		Description		
Nrm_Type			An NRM information handling a sub-path.		
Property	Туре	Mul	ti.	Unit	Description

NrmName	string	1	A name of NRM.
NrmUrl	string	1	A URL of NRM.

11.2.10. Bandwidth_Type

Entity	Inherits from Descript				ion					
Bandwidth_Type			An	An abstracted element of a requesting and assi						
			ba	bandwidth.						
Property	Туре	Mul	ti.	Unit	Description					
MinimumBW	GeneralBW_Typ	1			An acceptable minimum bandwidth requesting					
	е				from an application, user or other NRM to be					
					guaranteed. The guaranteed bandwidth must					
					not be assigned below the value of this					
					parameter. When a MaximumBW is given,					
					NRM decides the assigned bandwidth between					
					a MinimumBW and a MaximumBW.					
MaximumBW	GeneralBW_Typ	0	1		An acceptable maximum bandwidth requesting					
	е				from an application, user or other NRM to be					
					guaranteed. In a commercial network, clients					
					can pay within the value of this parameter. NRM					
					decides the assigned bandwidth between a					
					MinimumBW and a MaximumBW. This					
					parameter must be requested with a					
					MinimumBW.					
PeakBW	GeneralBW_Typ	0	1		A requesting bandwidth without guarantee. The					
	е				value of this parameter should be equal to or					
					less than the rate of the physical network					
					interface.					
GuaranteedBW	GeneralBW_Typ	1			An assigned bandwidth with guarantee.					
	е									

11.2.11. GeneralBW_Type

Entity	Inherits from	Description
GeneralBW_Type		

Property	Туре	Multi.	Unit	Description				
Rate	int	1		The number of bits that are transfered per unit				
				of time.				
BWUnit	BWUnit_Type	1		A unit of data transfer rate.				

11.2.12. PathProperties_Type

Entity	Inherits from			Description						
PathProperties_Type			A se	A set of path information.						
Property	Туре	Mul	ti.	Unit	Description					
Availability	float	0′	1	%	The ratio of the total time that a path is capable					
					of being used in a year.					
TransmissionDelay	int	0′	1	mse	The acceptable one-way time to transfer					
				С	between an APoint and a ZPoint. This					
					parameter doesn't include a forwarding delay in					
					switches or routers.					
SwitchingScheme	SwitchingSchem	0	1		A switching/routing scheme in a path.					
	e_Type									
EthernetParameters	EthernetParamet	0	1		A set of Ethernet related information.					
	ers_Type									
MPLSParameters	MPLSParameter	0′	1		A set of MPLS related information.					
	s_Type									
IPParameters	IPParameters_T	0′	1		A set of IP related information.					
	уре									

11.2.13. MediaType_Type

Entity	Inherits from		Description						
MediaType_Type				A media type of a termination point.					
< <abstract>></abstract>									
Property	Туре	Mu	lti.	Unit	Description				
	void								

11.2.14. OtherMediaType_Type

Entity	Inherits from		Description						
OtherMediaType_Typ	MediaType_Type		Th	The other media type.					
е									
Property	Туре	Mul	lti. Unit		Description				
OtherMediaTypeNam	string	1			A name of the other media type.				
е									

11.2.15. EthernetParameters_Type

Entity	Inherits from			Description					
EthernetParameters_			As	A set of Ethernet related information.					
Туре									
Property	Туре	Mul	lti.	Unit	Description				
MTU	int	0	1	Byte	A requested/allowable MTU.				
VLANTagID	int	0	1		A parameter for configuring virtual LANs in the				
					IEEE 802.1Q header.				
CoS	int	0	1		A parameter to differentiate traffic in the				
					Ethernet frame header.				

11.2.16. MPLSParameters_Type

Entity	Inherits from		Description						
MPLSParameters_Ty			As	A set of MPLS related information.					
pe									
Property	Туре	Mul	ti.	Unit	Description				
LSPID	string	0	1		A parameter to create a label switched path				
					(LSP) in MPLS networking.				
Exp	int	0	.1		A parameter to differentiate traffic in the MPLS				
					header.				

11.2.17. IPParameters_Type

Entity	Inherits from	Description
--------	---------------	-------------

IPParameters_Type		А	set of IF	Prelated information.			
Property	Туре	Multi.	Unit	Description			
PacketLossRate	float	01	%	The ratio of total lost IP packet outcomes to			
				total transmitted IP packets in a population of			
				interest. The detailed definition is described at			
				[Y.1540] as IPLR (IP Loss Rate).			
PacketErrorRate	float	01	%	The ratio of total errored IP packet outcomes to			
				the total of successful IP packet transfer			
				outcomes plus errored IP packet outcomes in a			
				population of interest. The detailed definition is			
				described at [Y.1540] as IPER (IP Error Rate).			
AverageJitter	int	01	mse	The average variation of the end-to-end delay			
			С	from a packet to the next packet.			
MaximumJitter	int	01	mse	The maximum variation of the end-to-end delay			
			С	from a packet to the next packet.			
Latency	int	01	mse	The average one-way IP packet transfer time			
			С	for a population of interest between an APoint			
				and a ZPoint with forwarding delays at switches			
				and routers. The detailed definition is described			
				at [Y.1540] as IPTD (IP Transfer Delay).			
LatencyVariation	int	01	mse	The variation of a one-way latency within a			
			С	stream of packets. The detailed definition is			
				described at [Y.1540] as IPDV (IP Delay			
				Variation).			
PacketReordering	boolean	01		NRM provides the guarantee to transfer			
				packets in order or not.			
ToS	int	01		A parameter reserved for the service type in the			
				IPv4 header.			

11.2.18. NetworkResourceSLADocument_Type

Entity	Inherits from		Description								
NetworkResourceSLA	SLADocument_Type		Α	set	of	information	related	to	network	service	level
Document_Type				agreement (SLA).							
Property	Туре	Mul	ti.	Uni	it	Description	1				

SLAAvailability	float	01	%	The ratio of the total time that an NRM is
				capable of being used in a year.
ProvisioningDelay	Duration_Type	01		The maximum time to activate an assigned
				path.
FailureReportDelay	Duration_Type	01		The maximum time to notify clients of failures.
Redundancy	string	01		The configuration to ensure the path continues
				under the failure(s).

11.3. Compute resources related data types

Elements defined in this section have a namespace prefix cdl.

11.3.1. ComputeResources_Type

Entity	Inherits from		Description		
ComputeResources_	ReservationResource		Compute resources		
Туре	s_Type				
Property	Туре	Multi.		Unit	Description
Site	string	01			A site name
Resources	Resources_Type	01			Resources defined in JSDL v 1.0
ComputeResourceSL	ComputeResour	01			SLA Document of compute resources
ADocument	ceSLADocument				
	_Туре				

11.3.2. ComputeResourcesSLADocument_Type

Entity	Inherits from		Description			
ComputeResourceSL	SLADocument_Typ	Document_Type		SLA Document of compute resources		
ADocument_Type						
Property	Туре	Mu	lti.	Unit	Description	
Description	string	0	1		An SLA document description	

11.4. IANA Mau MIB types

Elements defined in this section have a namespace prefix *iana*.

11.4.1. IANAMauMIBTyepName_Type

Entity	Inherits from	Description							
IANAMauMIBTypeNa	string	A name of the interface media defined as media							
me_Type		attachment units [IANA-MAU-MIB].							
Value	Description								
bOther	other or unknown								
bAUI	AUI								
b10base5	10BASE-5	10BASE-5							
bFoirl	FOIRL								
b10base2	10BASE-2								
b10baseT	10BASE-T duplex mode	unknown							
b10baseFP	10BASE-FP	10BASE-FP							
b10baseFB	10BASE-FB	10BASE-FB							
b10baseFL	10BASE-FL duplex mode	10BASE-FL duplex mode unknown							
b10broad36	10BROAD36								
b10baseTHD	10BASE-T half duplex	10BASE-T half duplex mode							
b10baseTFD	10BASE-T full duplex mode								
b10baseFLHD	10BASE-FL half duplex mode								
b10baseFLFD	10BASE-FL full duplex mode								
b100baseT4	100BASE-T4								
b100baseTXHD	100BASE-TX half duplex mode								
b100baseTXFD	100BASE-TX full duplex mode								
b100baseFXHD	100BASE-FX half duplex mode								
b100baseFXFD	100BASE-FX full duplex mode								
b100baseT2HD	100BASE-T2 half duplex mode								
b100baseT2FD	100BASE-T2 full duplex	100BASE-T2 full duplex mode							
b1000baseXHD	1000BASE-X half duplex	1000BASE-X half duplex mode							
b1000baseXFD	1000BASE-X full duplex mode								
b1000baseLXHD	1000BASE-LX half duplex mode								
b1000baseLXFD	1000BASE-LX full duplex mode								
b1000baseSXHD	1000BASE-SX half duplex mode								
b1000baseSXFD	1000BASE-SX full duplex mode								
b1000baseCXHD	1000BASE-CX half duplex mode								
b1000baseCXFD	1000BASE-CX full duple	1000BASE-CX full duplex mode							
b1000baseTHD	1000BASE-T half duplex	1000BASE-T half duplex mode							

b1000baseTFD	1000BASE-T full duplex mode
b10GbaseX	10GBASE-X
b10GbaseLX4	10GBASE-LX4
b10GbaseR	10GBASE-R
b10GbaseER	10GBASE-ER
b10GbaseLR	10GBASE-LR
b10GbaseSR	10GBASE-SR
b10GbaseW	10GBASE-W
b10GbaseEW	10GBASE-EW
b10GbaseLW	10GBASE-LW
b10GbaseSW	10GBASE-SW
b10GbaseCX4	10GBASE-CX4
b2BaseTL	2BASE-TL
b10PassTS	10PASS-TS
b100BaseBX10D	100BASE-BX10D
b100BaseBX10U	100BASE-BX10U
b100BaseLX10	100BASE-LX10
b1000BaseBX10D	1000BASE-BX10D
b1000BaseBX10U	1000BASE-BX10U
b1000BaseLX10	1000BASE-LX10
b1000BasePX10D	1000BASE-PX10D
b1000BasePX10U	1000BASE-PX10U
b1000BasePX20D	1000BASE-PX20D
b1000BasePX20U	1000BASE-PX20U

11.4.2. IANAMauMIBType_Type

Entity	Inherits from		Description		
IANAMauMIBType_Ty	MediaType_Type		A media type defined by IANA-MAU-MIB.		
pe					
Property	Туре	Multi.		Unit	Description
IANAMauMIBTypeNa		1			
me					

12. Error Cases

TBD

13. Optional Extensions

13.1. Lifetime

TBD

13.2. Notification

TBD

13.3. SLA

TBD

14. Security Consideration

TBD